


General purpose electrodeposited copper foil used in applications where traditional conductive treatments are not required.

#### Applications:

- EMI & RF Shielding
- Industrial use

#### Features:

- IPC Grade I
- No oils or organic coatings
- Available up to 1346 mm (53") wide

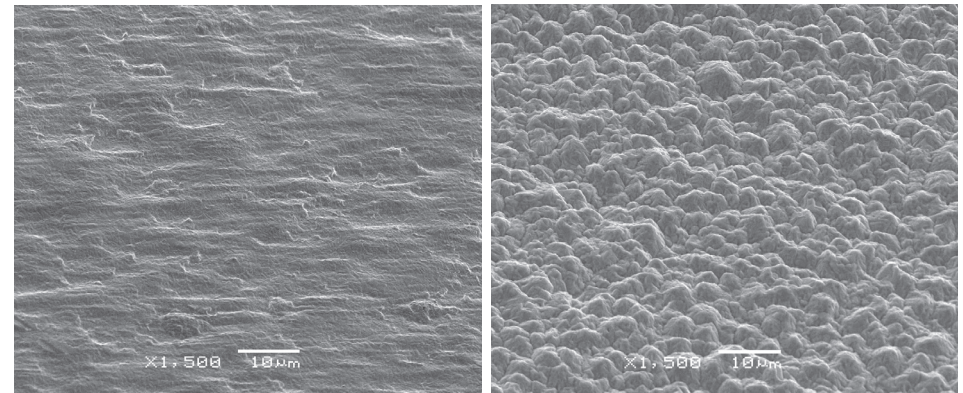

Untreated Drum Side  
H oz. /18 µm (1500x)

Untreated Matte Side  
H oz. /18 µm (1500x)

#### Typical Values:

Attribute		Unit	Value							Reference
Thickness Designation			H	1	2	3	4	5	6	IPC-4562, 1.2.5.1 Table 1-1; IPC-TM-650-2.2.12
Nominal Thickness		µm	18	35	70	103	137.2	171.5	205.7	
		oz.	1/2	1	2	3	4	5	6	
Area Weight		g/m <sup>2</sup>	152.5	305	610	915	1,220	1,525	1,830	
		g/254 in <sup>2</sup>	25	50	100	150	200	250	300	
		oz./ft <sup>2</sup>	0.5	1	2	3	4	5	6	
Roughness	Drum Side	µm	0.25							IPC-TM-650-2.2.17
		µ"	10							
	Matte Side	µm	0.5	0.8	1.4	2.3	2.7	3.3	3.8	
		µ"	20	30	55	90	105	130	150	
Tensile	Ambient	Kg/mm <sup>2</sup>	42.2	38.7	36.9	35.2	33.4	31.7	31.7	IPC-TM-650-2.4.18
		Kpsi	60	55	53	50	48	45	45	
Elongation	Ambient	%	8	15	20	25	28	30	30	

Information in this document is believed to be accurate and reliable and is for informational purpose only. This data sheet does not create any warranties, expressed or implied, as to the fitness for any particular purpose or use. The Denkai America Inc. name and logo are registered trademarks of Nippon Denkai, Ltd. © 2020, Denkai America Inc. All rights reserved. Rev May 4, 2020