


Superior adhesion electrodeposited copper foil.

Applications:


- PCB outer layers

Features:

- IPC Grade III
- Increased roughening treatment on matte side of foil
- Excellent adhesion to a wide range of resin systems

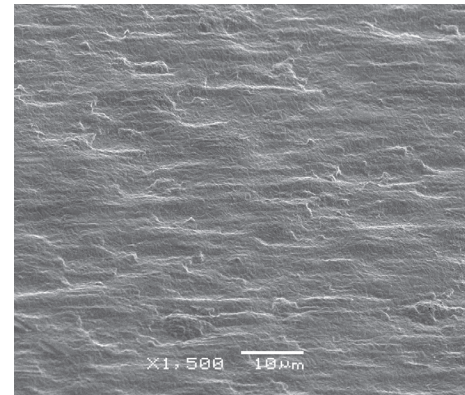

Untreated Drum Side
H oz. /18 μm (1500x)

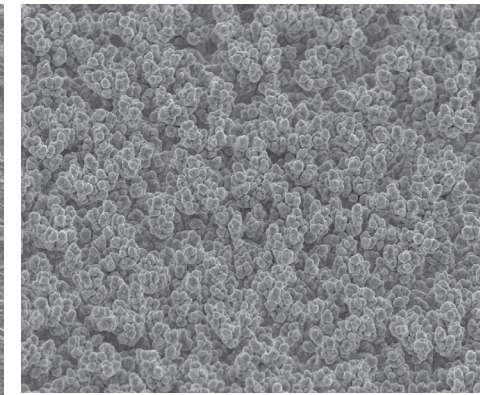

Treated Matte Side
H oz. /18 μm (1500x)

Typical Values:

Attribute		Unit	Value		Reference
Thickness Designation			T	H	IPC-4562, 1.2.5.1 Table 1-1; IPC-TM-650-2.2.12
Nominal Thickness		μm	12	18	
		oz.	3/8	1/2	
Area Weight		g/m ²	106.8	152.5	
		g/254 in ²	17.5	25	
		oz./ft ²	0.375	0.5	
Roughness	Drum Side	μm	0.25		IPC-TM-650-2.2.17
		μ"	10		
	Matte Side	μm	6.4	7.6	
		μ"	250	300	
Tensile	Ambient	Kg/mm ²	42		IPC-TM-650-2.4.18
		Kpsi	60		
	180°C	Kg/mm ²	21		
		Kpsi	30		
Elongation	Ambient	%	6	8	
	180°C	%	8		
Peel Strength* (Matte/Treated Side)	Cond. B	Kg/cm	1.5	1.8	IPC-TM-650-2.4.8
		Lbs/in	8.5	10	

* Peel strength measured on 170°C Tg Epoxy

Information in this document is believed to be accurate and reliable and is for informational purpose only. This data sheet does not create any warranties, expressed or implied, as to the fitness for any particular purpose or use. The Denkai America Inc. name and logo are registered trademarks of Nippon Denkai, Ltd. © 2020, Denkai America Inc. All rights reserved. Rev May 4, 2020