


Low profile electrodeposited copper foil.

Applications:


- PCB inner layers

Features:

- IPC Grade III
- Treatment on matte side of foil
- Excellent adhesion to a wide range of resin systems

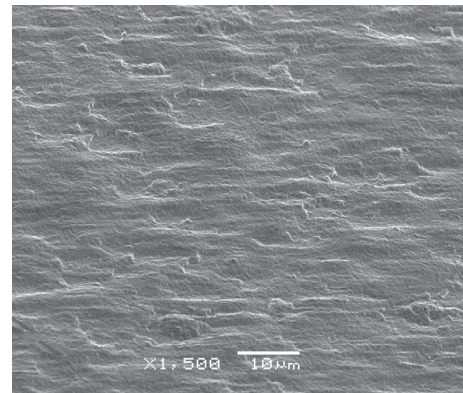

Untreated Drum Side
H oz. /18 µm (1500x)

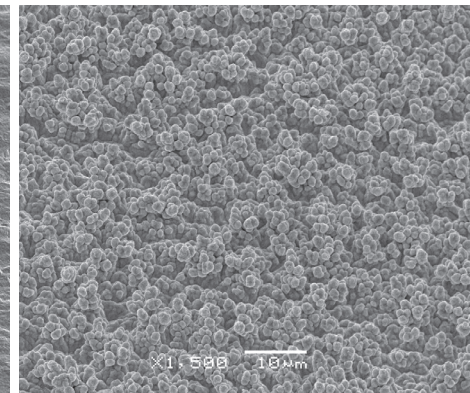

Treated Matte Side
H oz. /18 µm (1500x)

Typical Values:

Attribute		Unit	Value				Reference
Thickness Designation			Q	T	H	1	IPC-4562, 1.2.5.1 Table 1-1; IPC-TM-650-2.2.12
Nominal Thickness		µm	9	12	18	35	
		oz.	1/4	3/8	1/2	1	
Area Weight		g/m ²	75.9	106.8	152.5	305	
		oz./ft ²	0.25	0.375	0.5	1	
Roughness	Drum Side Ra	µm	0.25				IPC-TM-650-2.2.17
		µ"	10				
	Matte Side Rz	µm	4.5	5.1	5.1	6.4	
		µ"	175	200	200	250	
Tensile	Ambient	Kg/mm ²	42			38.7	IPC-TM-650-2.4.18
		Kpsi	60			55	
	180°C	Kg/mm ²	21				
		Kpsi	30				
Elongation	Ambient	%	>3	6	8	15	
	180°C	%	8				
Peel Strength* (Matte/Treated Side)	Cond. B	Kg/cm	>0.89	1.25	1.3	1.9	IPC-TM-650-2.4.8
		Lbs/in	>5.0	7.0	7.5	10.5	

* Peel strength measured on 170°C Tg Epoxy

Information in this document is believed to be accurate and reliable and is for informational purpose only. This data sheet does not create any warranties, expressed or implied, as to the fitness for any particular purpose or use. The Denkai America Inc. name and logo are registered trademarks of Nippon Denkai, Ltd. © 2020, Denkai America Inc. All rights reserved. Rev May 4, 2020